

Block Dimensions

Classic 8

General Information

- Absorption...Meets or exceeds ASTM C90-75 standards
- Compressive strength...3000 PSI Approximate minimum (unless otherwise specified)
- Composition . . . High strength, high density, "0" slump concrete

Unit Information

Beveled Classic Unit:

8"H X 18"W X 12"D, 78 Lbs. Approx. 1.00 Sq. Ft. Face

Straight Classic Unit:

8"H X 18"W X 12"D, 78 Lbs. Approx. 1.00 Sq. Ft. Face

Colonial 18 Unit:

8"H X 18"W X 12"D, 78 Lbs. Approx. 1.00 Sq. Ft. Face

Colonial 6/12 Unit:


8"H X 6'/12"W X 12"D, 78 Lbs. Approx. 1.00 Sq. Ft. Face

Universal Cap


4"H X 18"W Front and 4"H X 14"W Back, 54 Lbs. Approx.
0.50 Sq. Ft. Front, 0.39 Sq. Ft.Back
Average running length is 16" (see installation manual)

Face Options


- Face Patterns Beveled Split Face
- Straight Split Face
- Colonial Split Face

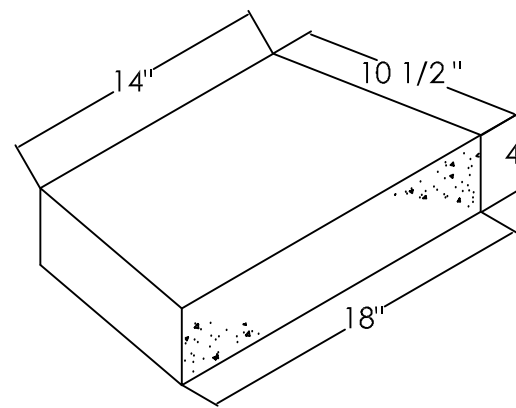


Universal Cap - front

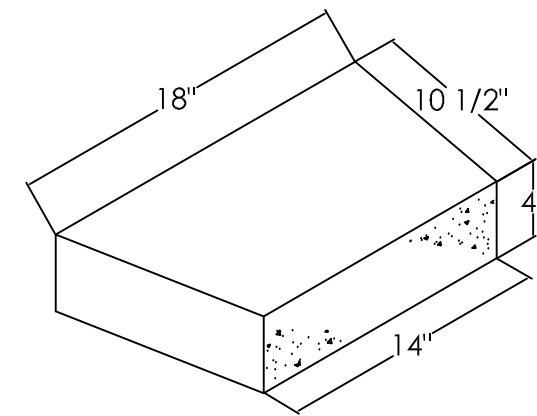


Universal Cap - Back

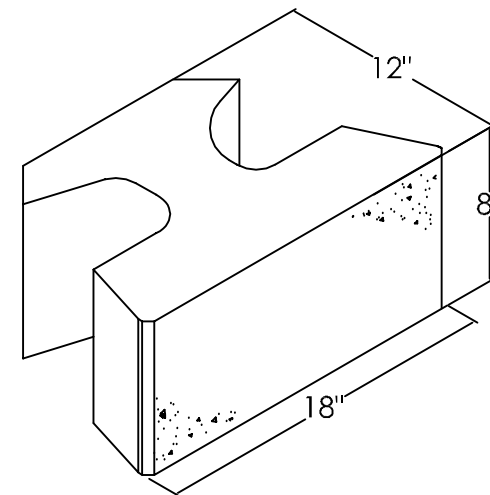


Classic 8 Unit (Straight)

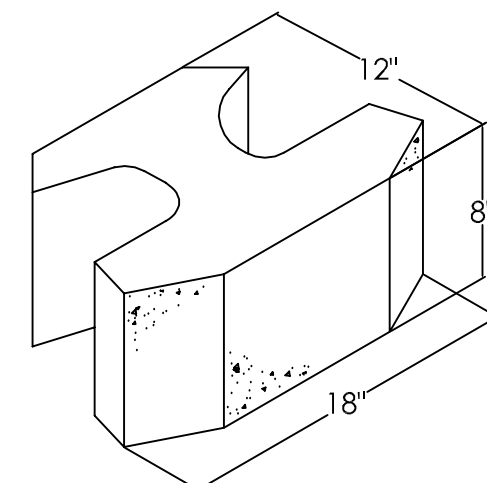

Classic 8 Unit (Beveled)

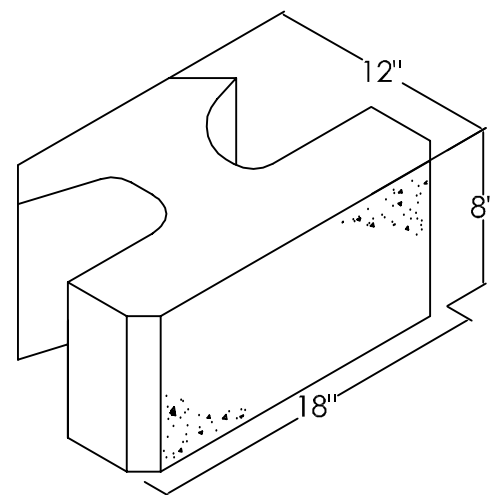

Classic 8 Colonial (18 Unit)

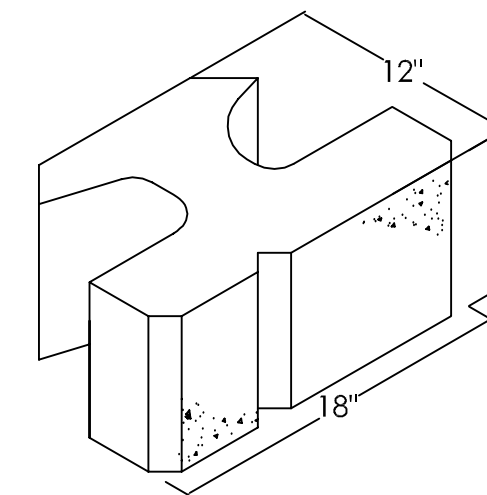


Classic 8 Colonial (6/12 Unit)

This drawing is furnished for preliminary design purposes only, and should not be used for final design drawings or construction drawings without the certification of a professional engineer registered in the state in which the wall will be constructed

No.	Date.	Revision.	By.

Prepared by:



ROCKWOOD
RETAINING WALLS
A better way.

Legend

	Impermeable Compacted Fill		3/4" Crushed Stone
	Compacted Fill		Leveling Pad
	Native Soil		Geogrid

Project Name:	XX
Project Location:	YY
Drawing Description:	Block Dimensions

Prepared For:	CCC DDD
Drawn By:	
Checked By:	
Sheet # or \$	
Date: MM/DD/YYYY	
Project Number: WWWPRO#	