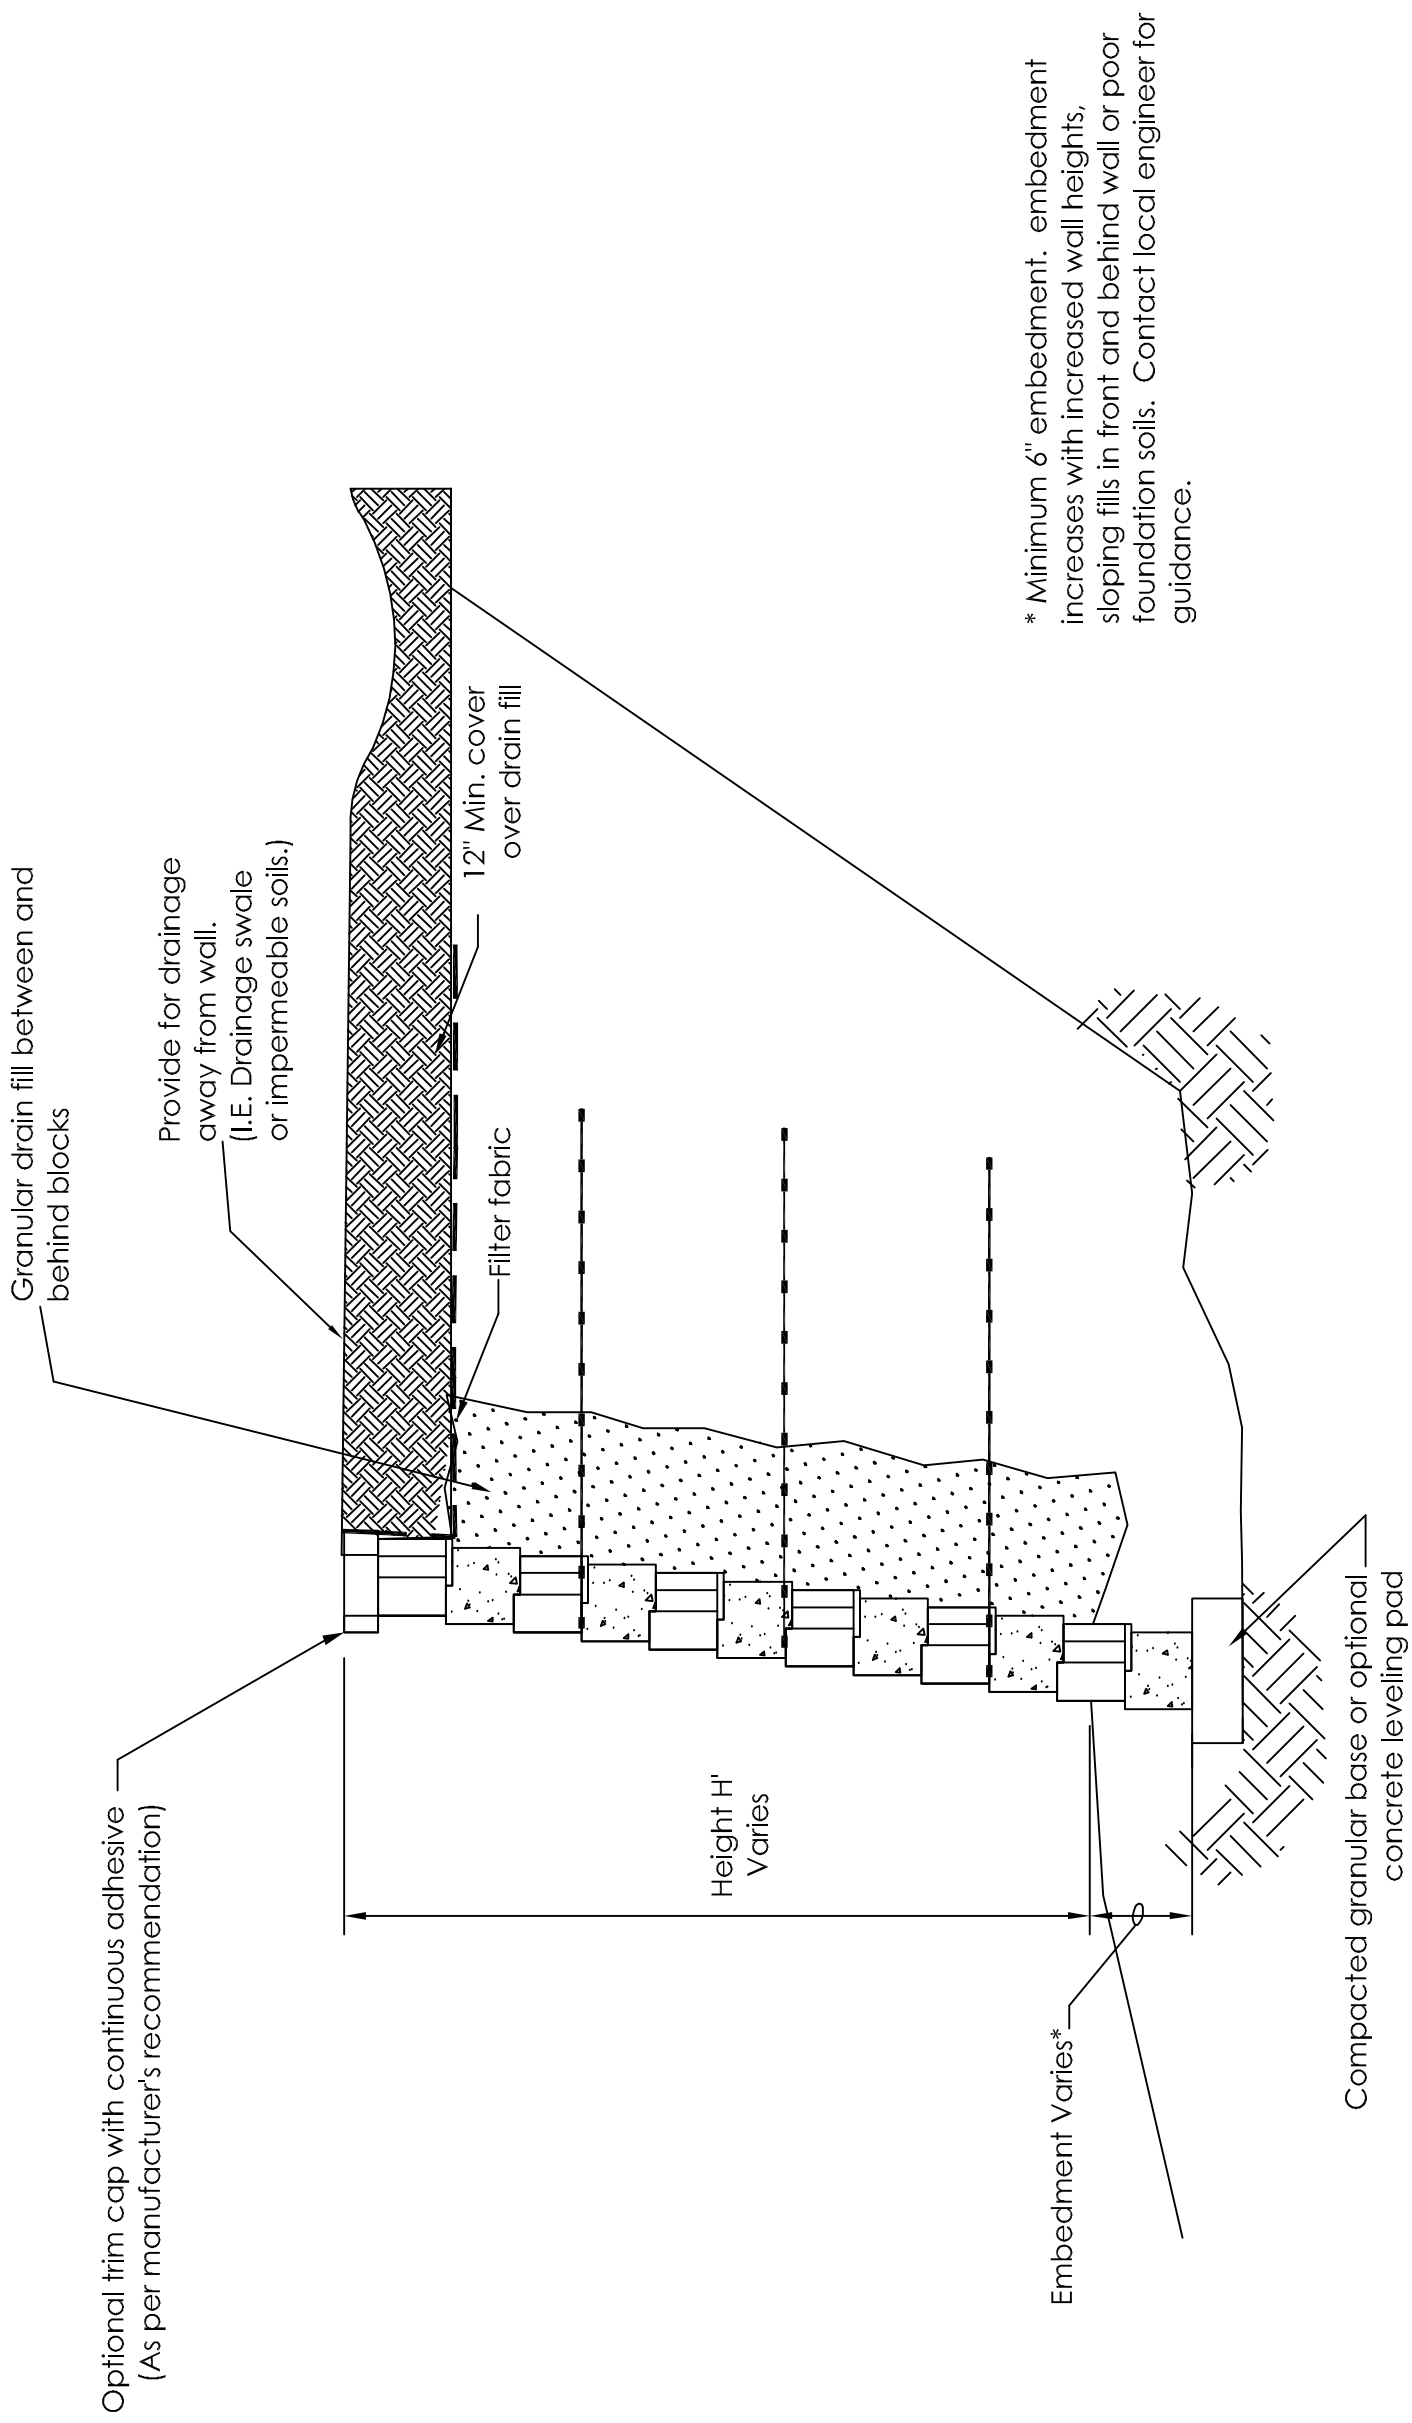


Typical Cross Section Monument HD®




* Minimum 6" embedment increases with increased wall heights, sloping fills in front and behind wall or poor foundation soils. Contact local engineer for guidance.

Scale: None






This drawing is furnished for preliminary design purposes only, and should not be used for final design drawings or construction drawings without the certification of a professional engineer registered in the state in which the wall will be constructed

| No. | Date. | Revision. | By. |
|-----|-------|-----------|-----|
| | | | |
| | | | |
| | | | |
| | | | |

Prepared by: 

ROCKWOOD
RETAINING WALLS
A better way.

Legend

| | |
|---|---------------------------|
|  | Impervious compacted fill |
|  | Compacted soil |
|  | Native soil |
| | 3/4" Crushed stone |
|  | Levelling pad |
|  | Geogrid |

Project Name: XX

Project Location: YY

Drawing Description: Typical Cross Section

Prepared by: CCC
Checked by: DDD

Sheet # of \$

Date: MM/DD/YYYY

Project Number: WWPRO#